


Bešavni cevni lukovi

Cevni lukovi $R=1.5$ (norma 3D) i $R=2.5D$ (norma 5D)

Standard: DIN 2605

Materijal: St37.0/St35.8

Uverenje o kvalitetu: 2.2 - 3.1B

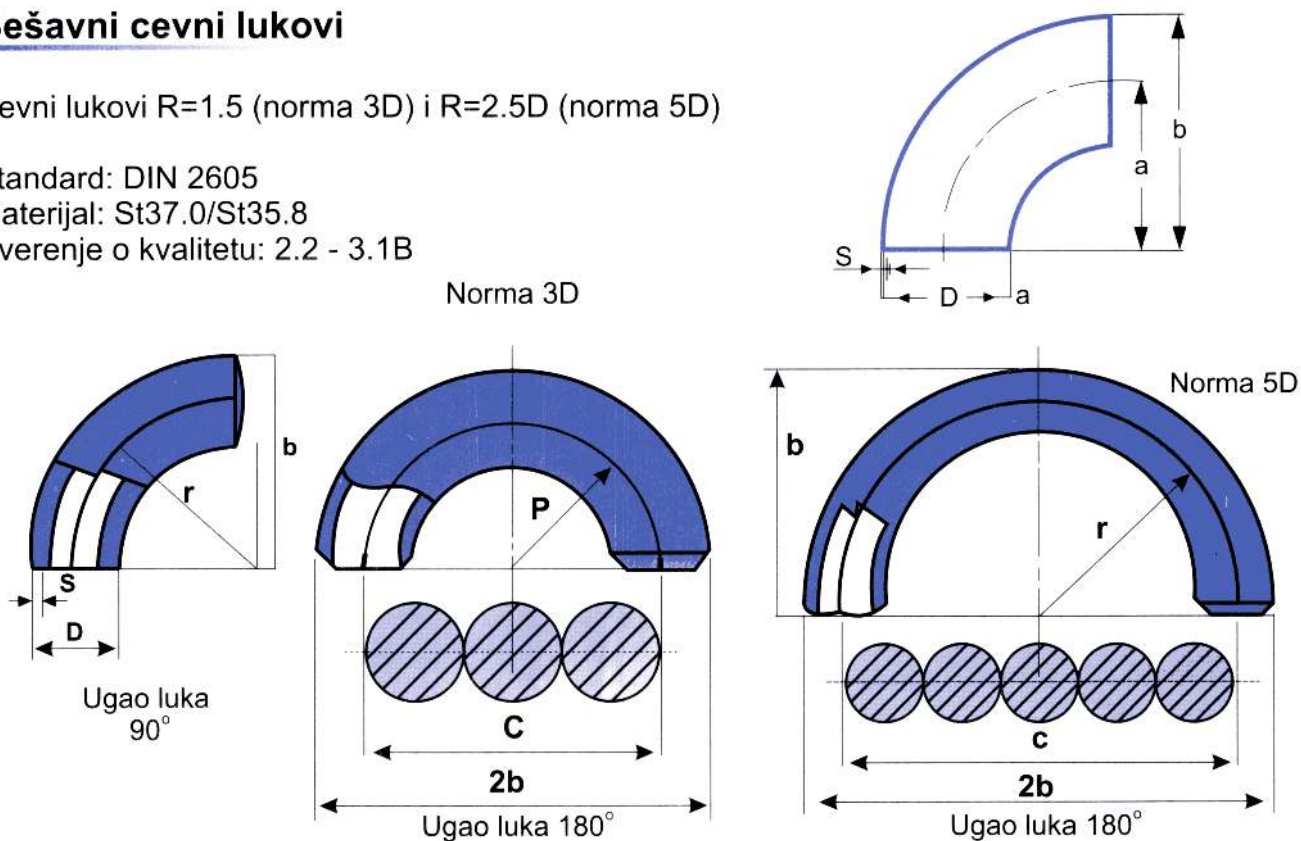

Spoljni prečnik mm	Debljina zida mm	Radijus 1.5 D			Radijus 2.5 D		
		a	b	Težina kg/kom	a	b	Težina kg/kom
21.3	2.0	28	38	0.04	43	53	0.07
26.9	2.3	29	43	0.06	58	71	0.13
33.7	2.6	38	56	0.12	73	90	0.23
42.4	2.6	48	69	0.19	93	114	0.37
48.3	2.6	57	82	0.26	108	132	0.50
60.3	2.9	76	106	0.49	135	165	0.87
70.0	2.9	92	127	0.70	160	195	1.21
76.1	2.9	95	133	0.78	175	213	1.44
88.9	3.2	114	159	1.21	205	250	2.18
101.6	3.6	134	184	1.82	238	288	3.25
108.0	3.6	143	196	2.07	253	306	3.68
114.3	3.6	152	210	2.35	270	327	4.17
133.0	4.0	181	247	3.62	313	379	6.25
139.7	4.0	190	260	4.00	330	400	6.94
159.0	4.5	216	294	5.82	375	454	10.10
168.3	4.5	229	313	6.54	390	474	11.20
193.7	5.4	270	367	11.10	455	552	18.55
219.1	6.3	305	414	15.80	510	620	26.50
273.0	6.3	381	518	24.80	650	787	42.30
323.9	7.1	457	619	38.90	775	937	67.50
355.6	8.0	533	711	39.80	850	1028	91.60
406.4	8.8	610	813	82.70	970	1173	132.00
457.2	10.0	686	914	119.00	1122	1350	194.00
508.0	11.0	762	1016	161.00	1245	1499	264.00
609.6	12.5	914	1219	264.00	1525	1830	441.00

Cevni lukovi mogu biti isporučeni prema željenom standardu, radijusu i kvalitetu.