


Prirubnice sa grlom PN6 i PN10

Standard: JUS M.B6.161 i 162
DIN 2631 i DIN 2632

Materijal: Č 0361, St 37.2

Uverenje o kvalitetu: 2.2. - 3.1.B

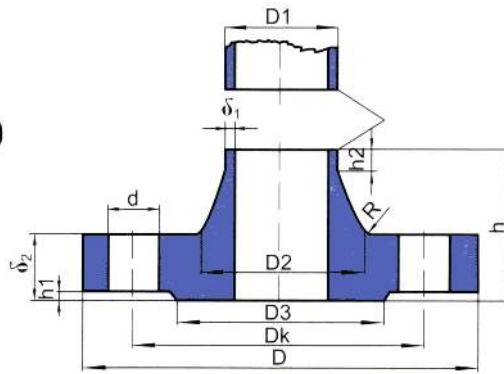

Cev		Prirubnica				Grlo				Zapt.površina oblik B		Vijci			Masa
Nazivni otvor DN	D ₁ mm	D mm	δ ₂ mm	D _k mm	h mm	D ₂ mm	δ ₁ mm	R mm	h mm	D ₃ mm	h ₁ mm	broj	Navoj	d mm	kg ≈
10	14 17.2*)	75	12	50	28	22 26	1.8	4	6	35	2	4	M 10	11	0.335
15	20 21.3*)	80	12	55	30	28 30	2	4	6	40	2	4	M 10	11	0.392
20	25 26.9*)	90	14	65	32	35 38	2.3	4	6	50	2	4	M 10	11	0.592
25	30 33.7*)	100	14	75	35	40 42	2.6	4	6	60	2	4	M 10	11	0.747
32	38 42.4*)	120	14	90	35	50 55	2.6	6	6	70	2	4	M 12	14	1.05
40	44.5 48.3*)	130	14	100	38	58 62	2.6	6	7	80	3	4	M 12	14	1.18
50	57 60.3*)	140	14	110	38	70 74	2.9	6	8	90	3	4	M 12	14	1.34
65	76.1*)	160	14	130	38	88	2.9	6	9	110	3	4	M 12	14	1.67
80	88.9*)	190	16	150	42	102	3.2	8	10	128	3	4	M 16	18	2.71
100	108 114.3*)	210	16	170	46	122 130	3.6	8	10	148	3	4	M 16	18	3.24
125	133 139.7*)	240	18	200	48	148 155	4	8	10	178	3	8	M 16	18	4.49
150	159 168.3*)	265	18	225	48	172 184	4.5	10	12	202	3	8	M 16	18	5.15
200	219.1*)	320	20	280	55	236	5.9	10	15	258	3	8	M 16	18	7.78
250	267 273*)	375	22	335	60	282 290	6.3	12	15	312	3	12	M 16	18	10.8
300	323.9*)	440	22	395	62	342	7.1	12	15	365	4	12	M 20	22	14.0
350	355.6*) 368	490	22	445	62	385	7.1	12	15	415	4	12	M 20	22	18.5
400	406.4*) 419	540	22	495	65	438	7.1	12	15	465	4	16	M 20	22	21.2
500	508*)	645	24	600	68	538	7.1	12	15	570	4	20	M 20	22	28.6
600	610*)	755	24	705	70	640	7.1	12	16	670	5	20	M 24	26	31.5
700	711	860	24	810	70	740	7.1	12	16	775	5	24	M 24	26	37.4
800	813	975	24	920	70	842	7.1	12	16	880	5	24	M 27	30	46.1
900	914	1075	26	1020	70	942	7.1	12	16	980	5	24	M 27	30	55.6
1000	1016	1175	26	1120	70	1045	7.1	16	16	1080	5	28	M 27	30	61.9
1200	1220	1405	28	1340	90	1248	8	16	20	1295	5	32	M 30	33	100

200	219.1*)	340	24	295	62	235	5.9	10	16	268	3	8	M 20	22	11.3
250	267 273*)	395	26	350	68	285 292	6.3	12	16	320	3	12	M 20	22	14.7
300	323.9*)	445	26	400	68	344	7.1	12	16	370	4	12	M 20	22	17.4
350	355.6*) 368	505	26	460	68	385	7.1	12	16	430	4	16	M 20	22	23.6
400	406.4*) 419	565	26	515	72	440	7.1	12	16	482	4	16	M 24	26	28.6
500	508*)	670	28	620	75	542	7.1	12	16	585	4	20	M 24	26	38.1
600	610*)	780	28	725	80	642	7.1	12	18	685	5	20	M 27	30	44.6
700	711*)	895	30	840	80	745	8	12	18	800	5	24	M 27	30	62.4
800	813*)	1015	32	950	90	850	8	12	18	905	5	24	M 30	33	84.1
900	914*)	1115	34	1050	95	950	10	12	20	1005	5	28	M 30	33	98.5
1000	1016*)	1230	34	1160	95	1052	10	16	20	1110	5	28	M 33	36	115
1200	1220	1455	38	1380	115	1255	11	16	25	1330	5	32	M 36	39	182


Prirubnice sa grlom PN16 i PN25

Standard: JUS M.B6.163

DIN 2633

Materijal: Č 1330, C 22.8

Uverenje o kvalitetu: 3.1.B

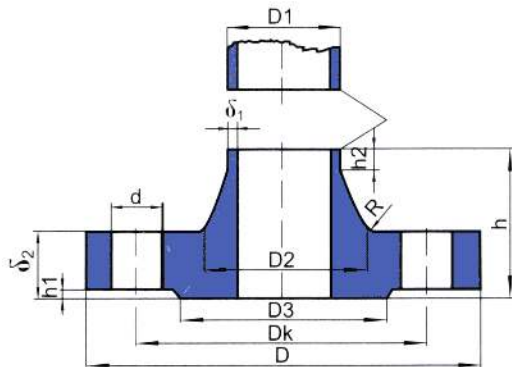

Cev		Prirubnica				Grlo				Zapt.površina oblik B		Vijci			Masa
Nazivni otvor DN	D ₁ mm	D mm	δ ₂ mm	Dk mm	h mm	D ₂ mm	δ ₁ mm	R mm	h mm	D ₃ mm	h ₁ mm	broj	Navoj	d mm	kg ≈
10	14 17.2*)	90	14	60	35	25 28	1.8	4	6	40	2	4	M 12	14	0.580
15	20 21.3*)	95	14	65	35	30 32	2	4	6	45	2	4	M 12	14	0.648
20	25 26.9*)	105	16	75	38	38 40	2.3	4	6	58	2	4	M 12	14	0.252
25	30 33.7*)	115	16	85	38	42 45	2.6	4	6	68	2	4	M 12	14	1.14
32	38 42.4*)	140	16	100	40	52 56	2.6	5	6	78	2	4	M 16	18	1.69
40	44.5 48.3*)	150	16	110	42	60 64	2.6	6	7	88	3	4	M 16	18	1.86
50	57 60.3*)	165	18	125	45	72 75	2.9	6	8	102	3	4	M 16	18	2.53
65	76.1*)	185	18	145	45	90	2.9	6	10	122	3	4	M 16	18	3.6
80	88.9*)	200	20	160	50	105	3.2	8	10	138	3	8	M 16	18	3.70
100	108 114.3*)	220	20	180	52	125 131	3.6	8	12	158	3	8	M 16	18	4.62
125	133 139.7*)	250	22	210	55	150 156	4	8	12	188	3	8	M 16	18	6.30
150	159 168.3*)	285	22	240	55	175 184	4.5	10	12	212	3	8	M 20	22	7.75
(175)	193.7*)	315	24	270	60	210	5.4	10	12	242	3	8	M 20	22	9.95
200	219.1*)	340	24	295	62	235	5.9	10	16	268	3	12	M 20	22	11.0
250	267 273*)	405	26	355	70	285 292	6.3	12	16	320	3	12	M 24	26	15.6
300	323.9*)	460	28	410	78	344	7.1	12	16	378	4	12	M 24	26	22.0
350	355.6*) 368	520	30	470	82	390	8	12	16	438	4	16	M 24	26	31.2
400	406.4*) 419	580	32	525	85	445	8	12	16	490	4	16	M 27	30	39.3
500	508*)	715	34	650	90	548	8	12	16	670	4	20	M 30	33	61.0
600	610	840	36	770	95	652	8.8	12	18	725	5	20	M 33	36	75.4
700	711	910	36	840	100	755	8.8	12	18	795	5	24	M 33	36	77.0
800	813	1025	38	950	105	855	10	12	20	900	5	24	M 36	39	101
900	914	1125	40	1050	110	955	10	12	20	1000	5	28	M 36	39	122
1000	1016	1255	42	1170	120	1058	10	16	22	1115	5	28	M 39	42	162
1200	1220	1485	48	1390	130	1262	12.5	16	30	1330	5	32	M 45	48	243

(175)	193.7*)	330	28	280	75	218	5.6	10	15	248	3	8	M 24	26	13.4
200	219.1*)	360	30	310	80	244	6.3	10	16	278	3	12	M 24	26	17.0
250	267 273*)	425	32	370	88	292 298	7.1	12	18	335	3	12	M 27	30	24.4
300	323.9*)	485	34	430	92	352	8	12	18	395	4	16	M 27	30	31.2
350	355.6*) 368	555	38	490	100	398	8	12	20	450	4	16	M 30	33	47.2
400	406.4*) 419	620	40	550	110	452	8.8	12	20	505	4	20	M 33	36	61.7
500	508*)	730	44	660	125	558	10	12	20	615	4	20	M 33	36	89.6
600	610*)	845	46	770	125	660	11	12	20	720	5	24	M 36	39	104
700	711*)	960	46	875	125	760	12.5	12	20	820	5	24	M 39	42	136
800	813*)	1085	50	990	135	865	14.2	12	22	930	5	28	M 45	48	186
900	914*)	1185	54	1090	145	968	16	12	24	1030	5	28	M 45	48	236
1000	1016*)	1320	58	1210	155	1070	17.5	16	24	1140	5	32	M 52	56	307


Prirubnice sa grlom PN40

Standard: JUS M.B6.166

DIN 2636

Materijal: Č 1330, C 22.8

Uverenje o kvalitetu: 3.1.B

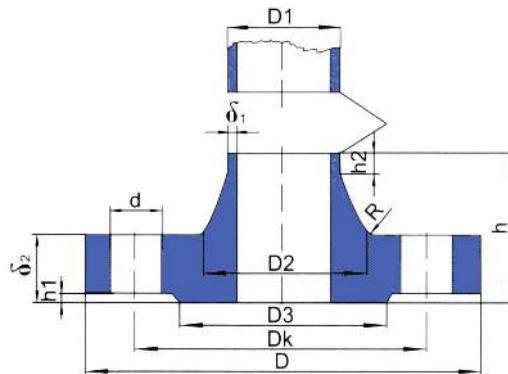

Cev		Prirubnica				Grlo				Zapt.površina oblik B		Vijci			Masa
Nazivni otvor DN	D ₁ mm	D mm	δ ₂ mm	D _k mm	h mm	D ₂ mm	δ ₁ mm	R mm	h mm	D ₃ mm	h ₁ mm	broj	Navoj	d mm	kg ≈
10	14 17.2*)	90	16	60	35	25 28	1.8	4	6	40	2	4	M 12	14	0.661
15	20 21.3*)	95	16	65	38	30 32	2	4	6	45	2	4	M 12	14	0.746
20	25 26.9*)	105	18	75	40	38 40	2.5	4	6	58	2	4	M 12	14	1.06
25	30 33.7*)	115	18	85	40	42 45	2.6	4	6	68	2	4	M 12	14	1.29
32	38 42.4*)	140	18	100	42	52 56	2.6	6	6	78	2	4	M 16	18	1.88
40	44.5 48.3*)	150	18	110	45	60 64	2.6	6	7	88	3	4	M 16	18	2.33
50	57 60.3*)	165	20	125	48	72 75	2.9	6	8	102	3	4	M 16	18	2.82
65	76.1*)	185	22	145	52	90	2.9	6	10	122	3	8	M 16	18	3.74
80	88.9*)	200	24	160	58	105	3.2	8	12	138	3	8	M 16	18	4.75
100	108 114.3*)	235	24	190	65	128 134	3.6	8	12	162	3	8	M 20	22	6.52
125	133 139.7*)	270	26	220	68	155 162	4	8	12	188	3	8	M 24	26	9.07
150	159 168.3*)	300	28	250	75	182 192	4.5	10	12	218	3	8	M 24	26	11.8
(175)	193.7*)	350	32	295	82	218	5.6	10	15	260	3	12	M 27	30	18.2
200	219.1*)	375	34	320	88	244	6.3	10	16	285	3	12	M 27	30	21.5
250	267 273*)	450	38	385	105	298 306	7.1	12	18	345	3	12	M 30	33	34.9
300	323.9*)	515	42	450	115	362	8	12	18	410	4	16	M 30	33	49.7
350	355.6*) 368	580	46	510	125	408	8.8	12	20	465	4	16	M 33	36	68.1
400	406.4*) 419	660	50	585	135	462	11	12	20	535	4	16	M 36	39	96.5
500	508*)	755	52	670	140	562	14.2	12	20	615	4	20	M 39	42	117